

# Robotic Infeeds Help Keep Packaging Lines Running At A High Level Of Efficiency

**This solution meets high-speed input requirements while reducing labor costs, scrap, and rework.**

**BY WALT LANGOSCH AND KIM NORRIS**

Ongoing demands by manufacturers for faster production speeds, greater flexibility, and faster return on investment (ROI) continue to shape the designs of today's high-speed packaging machines. Innovations such as servos, advanced controls, and multi-axis robots have allowed machinery designers to create systems that can handle the higher speeds required. However, these machines can operate only as fast as their product infeeds, especially when packaging multiple products per package.

Infeed speeds can affect productivity in both primary and secondary packaging scenarios. Infeeds that fail to keep pace with the equipment's production capabilities create costly unscheduled downtime while the machine waits for product, and speed is not the only concern. Improper infeeding will cause a high-speed packaging machine to jam, which stops the system and potentially causes damage to the product or the machine. This is especially true of thermoformers, which form, fill, and seal product blisters, and blister packaging machines, which pull preformed blisters from a magazine before filling and sealing.

Today, as many as 80% of installed thermoformers and blister packaging machines are manually loaded. To give an example of the expense that manual loading incurs, during a routine process evaluation, ESS Technologies, Inc., a designer, manufacturer, and integrator of high-speed packaging lines, reviewed a process for a prospective customer that required three personnel on three shifts to orient and manually load product into a blister packaging machine at a rate of 10 to 14 cycles per minute. The total cost of personnel salary, machine downtime due to misfed product, and employee absenteeism caused by repetitive-motion injuries placed the estimated annual cost of operation at around \$225,000 per machine.


Automated infeed systems offer a solution for maintaining fast and accurate product infeeding while reducing overhead expenses, such as those listed above.

First-generation automated equipment used fixed or "hard" automation technology, but today, the availability of affordable, flexible robotic automation systems allows packaging line designers to create high-speed systems for machine infeeds. The advantages become clear as one compares hard and robotic automation.

## **Hard Automation Vs. Robotics**

Hard automation refers to a sequence of processes and movements that are determined by the equipment, which has been designed to perform a single function, usually for a single product. This specialized design can come with a high cost, and the system is limited to handling only the product for which it was designed. The higher equipment cost associated with hard automation makes this solution viable for products made in large volume or products that have a long shelf life and little chance of being redesigned. Hard automated infeeds can be designed to meet high-speed machine input requirements, but changeover to handle different products presents significant downtime for the packaging line. Annual and routine maintenance associated with replacing cylinders, bearings, bushings, and other wear parts also can affect overall cost. In addition, failure to install the correct parts or align them properly results in additional downtime, scrap and rework.

Flexible automation typically refers to robotic systems. These systems produce batches of products, which can be output in quantities ranging from less than 100 pieces to several thousand units per production run. Each new batch, depending on product design, may require a simple change of robotic end-of-arm tooling (EOAT) and programming — programming usually is performed in seconds via a human-machine interface (HMI). Changeover times are typically under five minutes for a robotic system; today's robotic end effecters are designed with quick release, no-tool connections, requiring only a few minutes to change the EOAT.

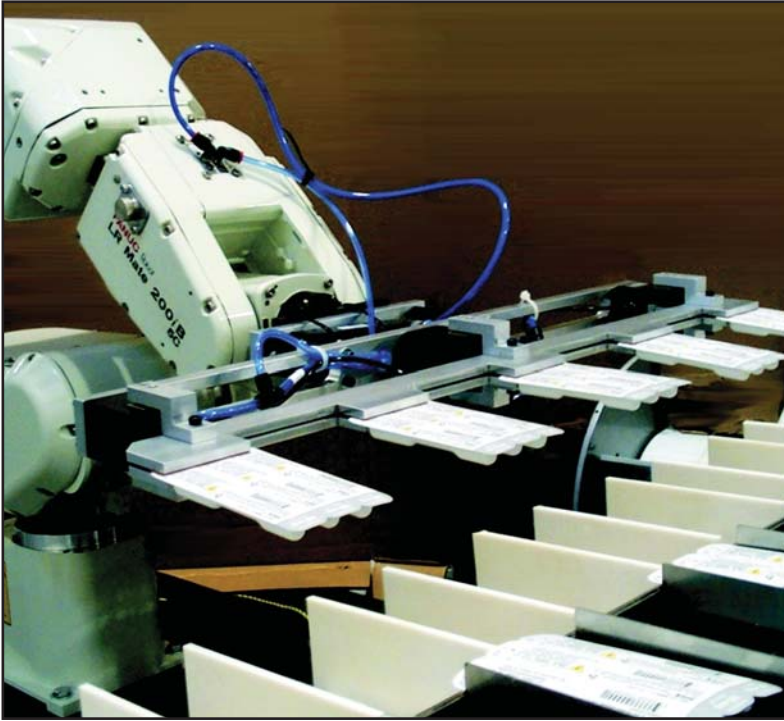

Blister packs of drug delivery devices being robotically collated and loaded into a cartoner infeed bucket

To meet high-speed input requirements and provide greater flexibility for product handling, robotic machine infeeds offer a solution to keep packaging lines running at optimum efficiency while reducing labor costs, scrap, and rework. For example, in the blister loading application described earlier, ESS Technologies, Inc., determined that one robotic loading system, complete with a FANUC robot, custom EOAT, a product bowl feeder, a secondary orientation device, and programming would offer an ROI of under one year, allowing valuable human resources to be redeployed in other parts of the manufacturing process. In addition, robotic loading of the blister packaging machine allowed the machine to reach a production speed of 14 to 18 cycles per minute compared with 10 to 14 cycles per minute achieved by the manual loading process.

High-speed multi-axis robots can easily be reconfigured for new products simply by replacing the end effector and adding another program. Changeover occurs in a matter of minutes, and sensors alert the operator via the HMI if the correct end effector is in place. Today's robots are easy to program, and often, multiple product runs can be configured with one control program, creating a high-speed machine infeed system that handles multiple SKUs with little additional overhead expense or downtime.

### Real World Solution

The following application illustrates the advantages of

robotic infeeds for several types of packaging equipment. A pharmaceutical manufacturer needed an automated high-speed system for assembling and packaging a drug delivery device. The customer required a full turnkey solution with the integration of feeders, hoppers, conveyors, material handling systems, and the inspection of the product at every stage of the assembly and packaging process. ESS engineers, working with the customer, designed an integrated system that assembles 320 parts per minute, then packages the drug delivery device. The system integrated 16 pieces of feeding and packaging equipment, including seven TaskMate robotic systems, a Bergami AS 120 Horizontal Cartoner, a Bergami C 97 Case Packer, and an ESS robotic mini cell palletizer. ESS Technologies' TaskMate robotic systems incorporate FANUC robots with ESS-designed EOAT to handle the assembly, collating, and loading/unloading of the drug delivery devices.


Robotics played a key role in the design of the system, especially in maintaining the required infeed speeds to keep a wrap-around labeler, a thermoformer machine, and an automatic cartoner performing at optimum speeds. Dosed tablets and handles, components for the drug delivery device, enter the dual-lane assembly process through separate feeders. Two FANUC LR Mate 200iB robots, with ESS-designed EOAT, insert the handles into the tablets. Two more robots collate the devices and transfer them to a thermoformer infeed conveyor. A fifth robot automatically loads 30 completed assemblies per pick to thermoformed blisters.

At the thermoformer discharge, a sixth FANUC LR Mate 200iB removes blister packs, inspects them, and rejects incorrectly filled or sealed blisters. Correct blister packs are placed on a five-lane conveyor to a seventh TaskMate robotic system that collates and nests the blisters into groups of 10 packs per carton (three devices per blister pack). Collated blister packs are inserted into cartons using a Bergami AS 120 Horizontal Cartoner. During cartoning, vision systems verify the bar code on the blister, inserts, and carton flap. The filled carton crosses a high-speed checkweigher to verify content before entering the Bergami C 97 Case Packer. The cartons are loaded into shipper cases, which are conveyed to the ESS robotic mini cell palletizer for final palletizing.

By incorporating robotic infeed cells, which also served as discharge systems and inspect/reject systems, throughout the assembly and packaging process, ESS provided a high-speed, high-performance, highly flexible packaging line that met the production requirements for the assembly and packaging of the drug delivery device.



End-of-arm tooling for tray loading

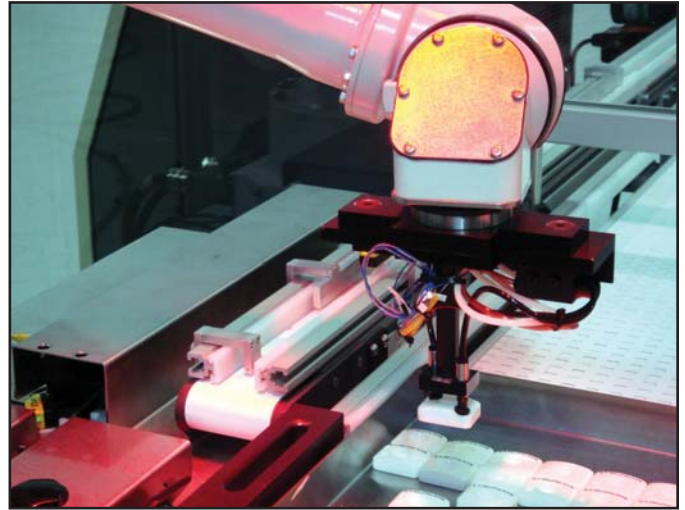

Robot with integrated vision and line tracking moves diagnostic test kits from a tray to a continuous motion infeed conveyor

The fully automated system doubled the production rate of the drug delivery devices. In addition, the number of required personnel was reduced from 15 to five people, allowing the customer to reassign several personnel to other processes.

## Conclusion

It doesn't take a crystal ball to know that the forces that have shaped today's packaging equipment will continue to do so for the foreseeable future. As the number of SKUs proliferates, packagers will look to machinery manufacturers to develop machinery that is adaptable and offers efficient, tool-free changeovers. Machines will need to handle a range of applications and product configurations as flexibility becomes as vital as speed. Tomorrow's machines will handle new, lighter, more flexible packaging materials, determined by the consumer-driven push for smaller ecofriendly packaging sizes and lower weights that reduce the waste and cost associated with the manufacture and transport of products.

While the focus will include flexibility, reliability, and high machine speed, pricing pressures will continue to influence packagers and machinery suppliers to find ways to retrofit existing lines to meet current requirements. By replacing manual or hard automation processes with flexible automation, manufacturers in all industries can increase line performance while addressing the emerging requirements for traceability, data management, and anti-counterfeiting strategies.

Flexible automation systems and the programming and controls that are used to operate them are uniquely suited to meet these emerging requirements. Data generated during the production run is automatically stored in the PLC (programmable logic controller) of the robotic cell.

Networking options allow that data to be accessed remotely as part of a system to monitor the complete supply chain.

Vision systems and line tracking for inspection, part selection, parts data, etc., add further flexibility to any robotic system, and vision also plays a role in meeting requirements for supply chain traceability and product quality. The FANUC Robotics System R-30iA controller comes standard with iRVision hardware. By loading the vision software option and connecting a 2-D camera or 3DL sensor to the controller, a vision process is added to the robotic application.

Robotics offers a complete solution for the automation of primary and secondary packaging lines. As flexibility increases and the cost to install robotic systems decreases, more and more manufacturers can improve production speeds and reduce scrap and rework by incorporating robotic cells to handle machine loading and unloading. The dexterity and speed of today's multi-axis robots has never been greater, making robotic loading a cost-effective means of keeping up with today's high-speed packaging equipment. ■

---

*Walt Langosch has served as director of sales & marketing for ESS Technologies, Inc., since 2006. Prior to joining ESS Technologies, Walt worked as VP sales & marketing for ARPAC and as general sales manager for Kronos. He has more than 30 years of experience building, servicing, and marketing packaging machinery and has overseen many successful installations of integrated robotics.*

*Kim Norris has worked as sales project coordinator for ESS Technologies, Inc., since 2007. Kim has 16+ years of experience in marketing communications and technical writing. She is the editor of several engineering reference guides and has an MA in English from Virginia Tech.*

---